

Folding scaffolding



Fig. Order No. 115301

Standard light-metal folding scaffolding for narrow passages

Whenever space is extremely limited, folding scaffoldings will be right solution:

- Folding scaffolding fit through every German standard door and requires only little space when folded together.
- The following sizes are available:
0.75 x 1.80 m or 1.35 x 1.80 m, with which working heights of up to 3.00 m can be made.

Four steering castors, diam. 125 mm, with arresters; non-slip platform ensures safe movement.

The unit is delivered partly assembled. Once assembled completely, the scaffolding can be opened and closed in a matter of seconds.



Fig. Order No. 115401

15



Fig. Order No. 27945

Overview of technical data:

- GS tested; in keeping with the German Accident Prevention Regulations
- Foldable
- Working height up to 3.00 m
- Scaffolding dimensions:
0.75 x 1.80 m 1.35 x 1.80 m
- Steering castors, diam. 125 mm, with arrester
- Load: 1.5 kN / sqm

Parts list	Order No.	115301	115401
Folding frame unit with four steering castors, diam. 125 mm, with arrester	27945	1	-
Folding frame unit with four steering castors, diam. 125 mm, with arrester	27946	-	1
Platform without trapdoor	27254	1	2
Working height up to approx. m	3.00	3.00	
Scaffolding height m	1.72	1.72	
Platform height m	0.99	0.99	
Scaffolding dimensions m	0.75 x 1.80	1.35 x 1.80	
Weight approx. kg	36.0	52	
Order No.	115301	115401	

Folding scaffolding

Light-metal folding scaffolding with extension unit

In addition to all the advantages offered by the scaffoldings Nos. 115301 / 115401, this folding scaffolding with extension unit offers even more advantages in use and in safe ascent and descent: A working height of up to 3.60 m is made with the extension unit.

The non-slip platform comes with a large trapdoor; a stable railing left and right has been provided as a fall protection in keeping with the legal regulations.

No tools required for assembly and disassembly.

When folded together, the unit needs little space for storage and transport.

For ballast application, please refer to the assembly instructions.


Overview of technical data:

- GS tested; in keeping with the German Accident Prevention Regulations
- Working height up to 3.00 m
- Platform with trapdoor
- Railing
- Scaffolding dimensions:
0.75 x 1.80 m
1.35 x 1.80 m
- Other construction and equipment as in order Nos. 115301 / 115401



15

Fig. Order No. 115601

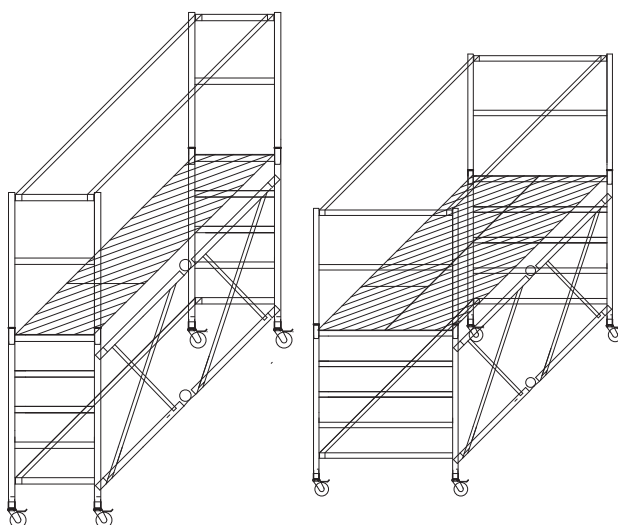

Parts list	Order No.	115601	115701
Folding frame unit with four steering castors, diam. 125 mm, with arrester	27945	1	-
Folding frame unit with four steering castors, diam. 125 mm, with arrester	27946	-	1
Platform with trapdoor	27931	1	1
Platform without trapdoor	27254	-	1
Horizontal brace	27935	3	3
Railing frame 0.75 m	27255	2	-
Railing frame 1.35 m	27256	-	2
Working reach up to approx. m	3.60	3.60	
Scaffolding height m	2.65	2.65	
Platform height m	1.54	1.54	
Scaffolding dimensions m	0.75 x 1.80	1.35 x 1.80	
Weight approx. kg	47.0	71.0	
Order No.	115601	115701	